premium
BY LUCIDE

Multimode Gateway (Zigbee 3.0 + BLE Mesh) instruction

Contents

IMPORTANT NOTICE – READ BEFORE CONNECTION....2
APP control details....3
Install the APP....3
Pairing with Network 2.4 G....3
Add the Lucide Linial lighting fixtures....6
Control your light....9
Feature....10
Parameter....11
Indicator status....11
Attention....12

IMPORTANT NOTICE – READ BEFORE CONNECTION

TURN OFF THE LIGHTS BEFORE YOU START THE SETUP OF THE GATEWAY.

When first powered on, **Lucide Linial** lighting fixtures enter pairing mode and blink for 10 minutes before switching to standard mode (warm white 2700K, 100%).

Ensure the gateway is installed before turning on the lights.

If the lights are already in standard mode, simply reset them by toggling the power off and on eight times.

Make sure you have the name and password of your wifi-network at hand before proceeding.

APP control details

Install the APP

Note: You can use any Zigbee-compatible app, such as Tuya Smart, Woox, Hue, or Smartlife. Installation steps may vary, so consult your app's manual.

Download and install the “Tuya Smart” app by searching **“Tuya Smart”**

in the Apple Store or Google Play Store,

or by scanning the provided QR code.

If this is your first time using the app, please create an account.


Pairing with Network 2.4 G

1) Wire the gateway with power source.


2) Standby pairing with Network

If the indicator flashes slowly (1 times within 3 seconds) proceed to the next step.


If the gateway is not flashing, please long press “SET” 5 seconds to reset the gateway.

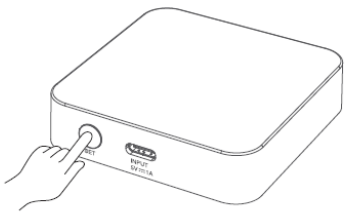

3) Click “+” in APP

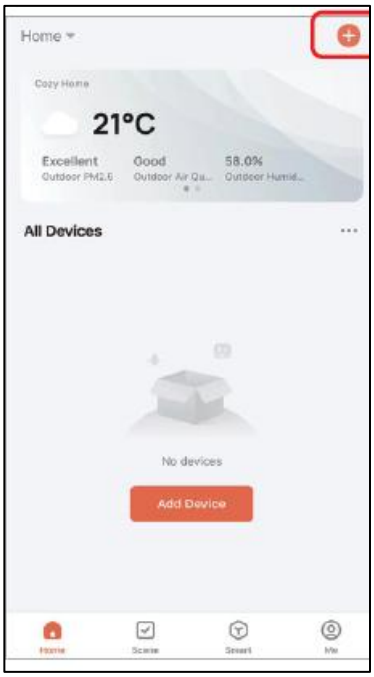

4) Click “Add Device”

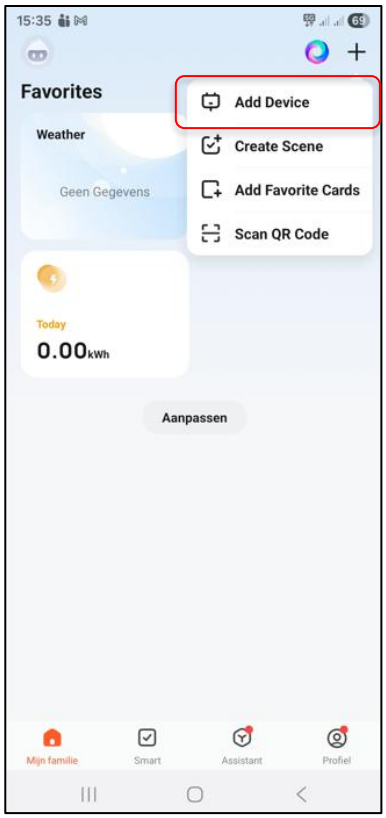


5) Your Zigbee gateway should be visible.




6) if the gateway is not visible, you need to add it manually

- Select “Gateway Control”
- Select “Wireless Gateway (BLE)”

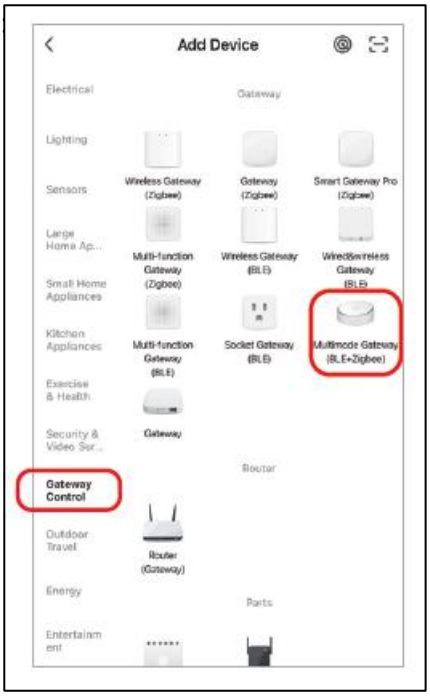


7) Connect to Gateway to the same Wifi-Network as your phone or tablet

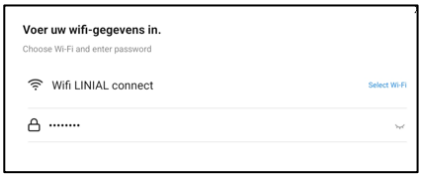

Congratulations, your gateway is ready, you can start adding the **Lucide Linial** lighting fixtures.

Add the Lucide Linial lighting fixtures


1) Select the connected gateway

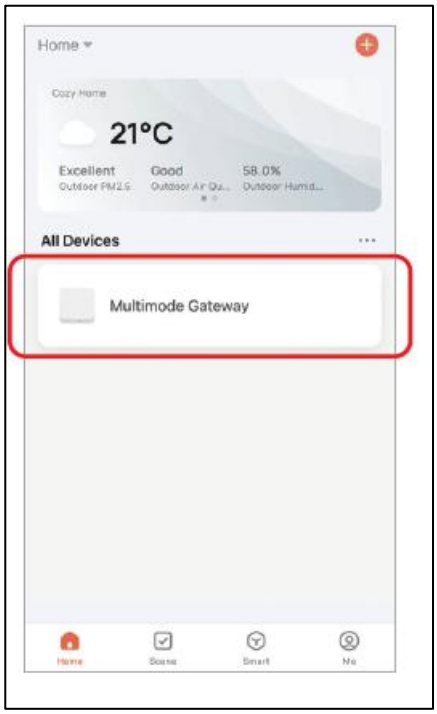

2) Power on the **Lucide Linial** Lighting fixtures.


If they are blinking : you can start adding the lights.

If not, power off / power on the lights 8 times to reset them

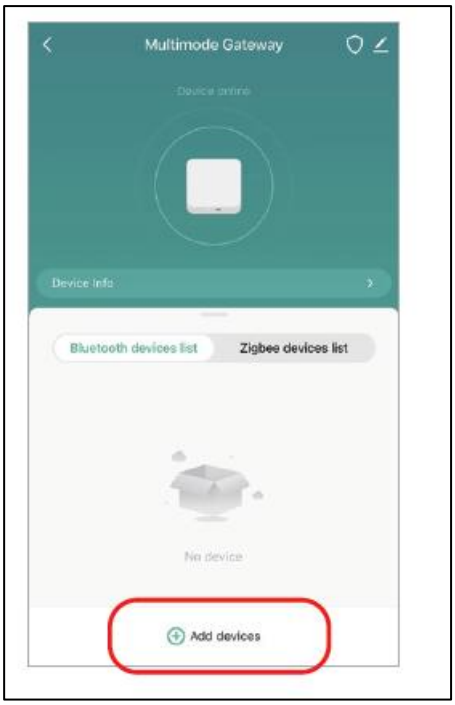

3) Click “Add devices”

4) Click “Add new devices”

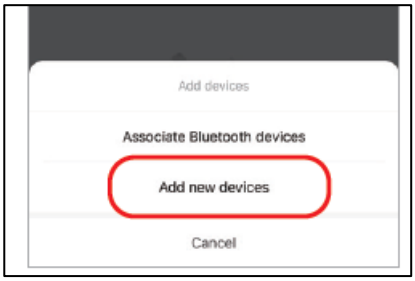

5) Devices will be searched over a while





5). Click “next “

You can now

- Change the name of the lamp
- Assign it to a room


  By clicking the pencil

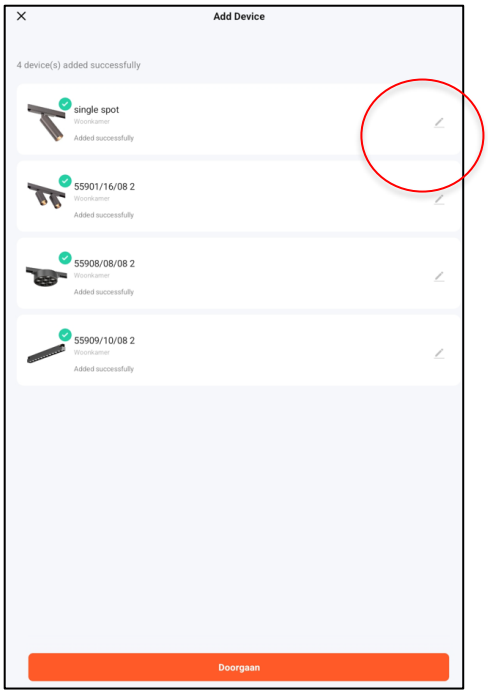

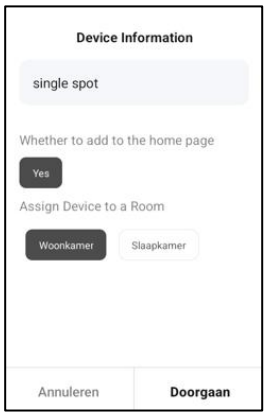


Or Click “next”

Close this window “x”

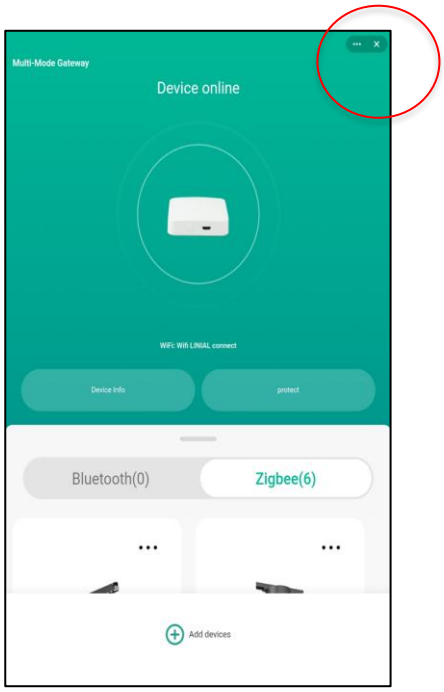


Control your light

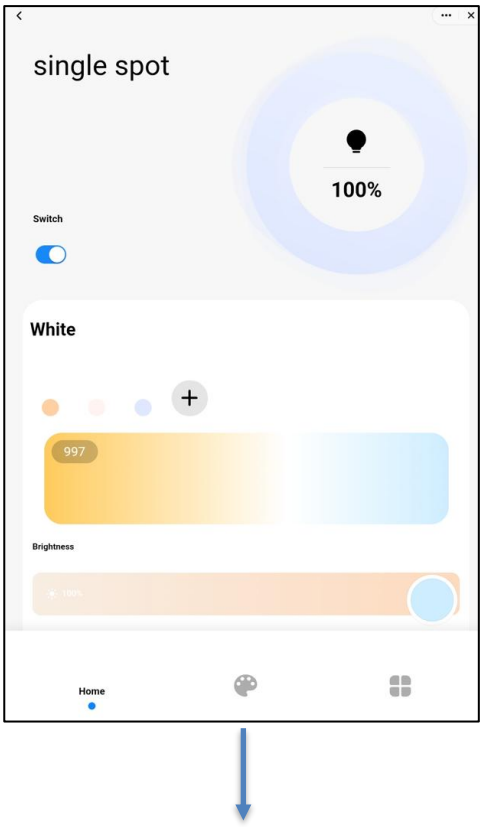

Color changes from warm to cold

Dim your light

Scenario

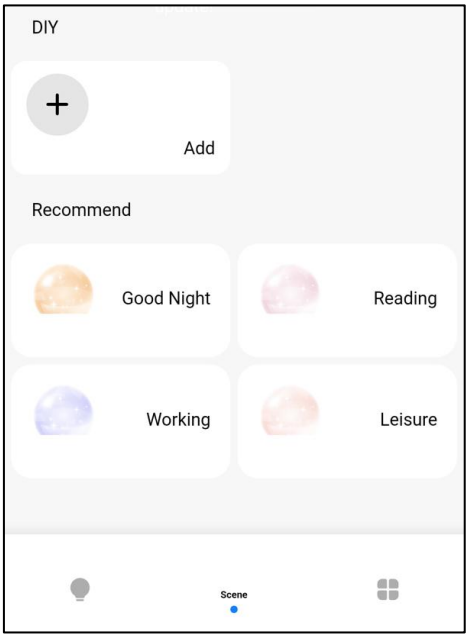


For further information on sharing the app, creating scenario's, optimizing rooms, … please refer to the manual of the specific app.

Feature

This compact smart gateway supports multiple communication protocols. It connects to iCloud and smartphones through a Wi-Fi network, allowing users to monitor the status of connected Zigbee or BLE MESH (SIG) devices, add or reset devices, manage third-party controls, and control sub-device groups via the Tuya Smart App.

The gateway is suitable for a wide range of smart living applications.

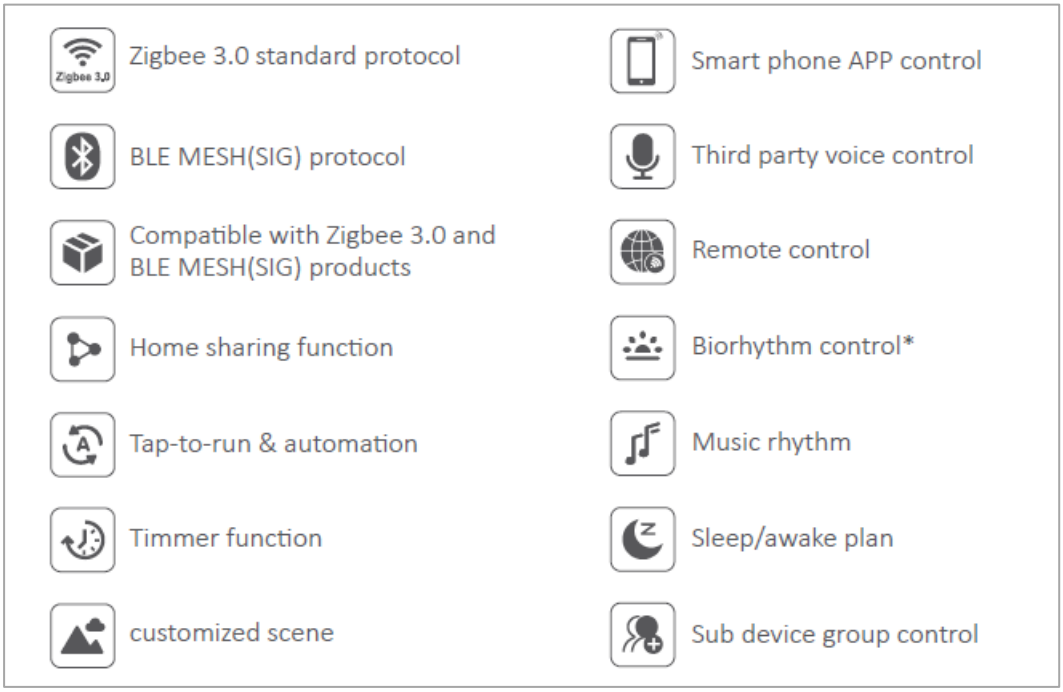

* Biorhythm: imitate variation of natural brightness and color temperature, make us to enjoy natural lighting feature.

Parameter

Model No. : ZB-Box3


Input : 5V - 1A (Type-C)

Working temperature : -10~40°C

Wireless standard : Wi-Fi IEEE 802.11b/g/n 2.4GHz, Zigbee 802.15.4, Bluetooth 5.0

Connected device(Max): Bluetooth Mesh + BLE SIG+Zigbee device (128pcs totally) only support 3pcs device for single bluetooth connection

Control distance: 30m (indoor), 100m+ (outdoor)

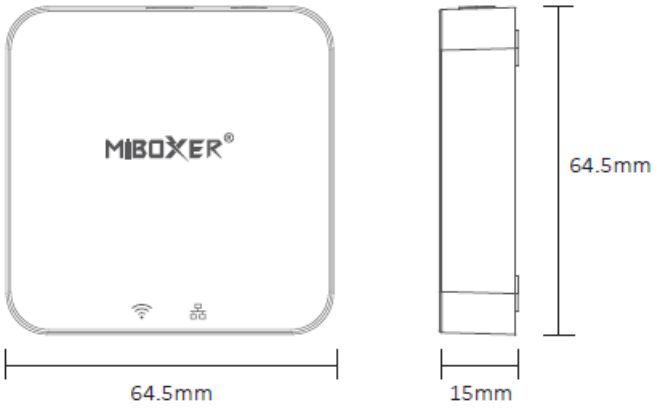

Indicator status

Device status	Indicator	Indicator
Pairing with WiFi	Flash slowly	On
Connected with WiFi	On	On
Add zigbee device	On	Flash quickly
WiFi offline	Off	On

Attention

1. Stay away from magnetic area while doing installation, or it will affect control distance.
2. Don’t install device in the place where is strong sun shine, high temperature or humidity, working temperature is -10~40°C.
3. Don’t disassemble device if you are not expert, or device damaged simply.

Scan QR code or review video from following link

https://miboxer.com/light/video/zigbee_bue.html

Thank you for your purchase.